




INJECTING/DOSING



We offer products ranging from units for small quantity flow for PU foam production, to assembled units for lubricant dosing, to injection systems for air compressors or combustion engines.

Individually selected pumps fitted with specific material and using sealing liquid (e.g. Mesamoll) can convey various different types of media such as isocyanate, amine, pentane, demineralized water etc. with high dosing accuracy using mechanical or electronic speed control. Accessories can be added as per customer requirements.

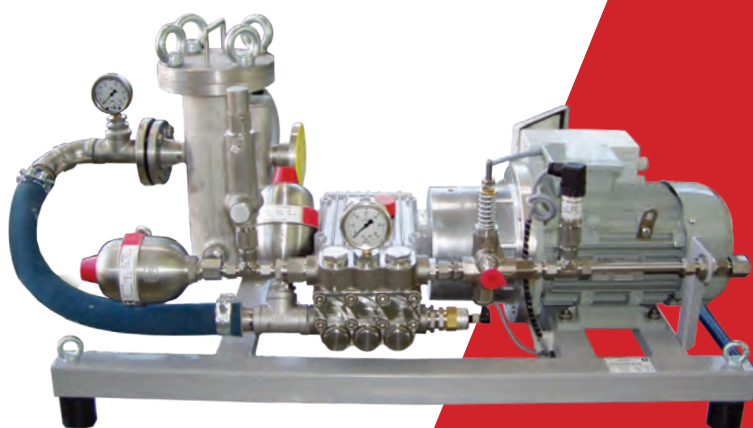

We would be pleased to send you a non-binding offer



High Pressure Pumps - Systems - Accessories

Speck-Triplex-Pumpen GmbH&Co KG

Walkenweg 41 - D-33609 Bielefeld - Telephon: +49 (0)521 970480 - Telefax: +49 (0)521 9704829

E-Mail: info@speck-triplex.de - Internet: www.speck-triplex.de



PUMP MODELS

MATERIAL

MEDIA-WETTED

Pump Model

Brass	AISI 303	AISI 316 TI	NiAl-Bronze (Seawater)	UNS S 318 03 (Seawater)	Volume max.		Pressure max.	
					l/min	Gpm (US)	bar	PSI
NP10/.....(C)	-	NP10/.....RE	NP10/.....S	-	1-15	0,3-4	160-140	2320-2030
-	NP11/.....	-	-	-	1-7	0,3-1,9	220	3190
NP16/.....	-	-	-	-	14-21	3,7-5,6	280-140	4060-2030
NP25/.....(C)	NP25/.....R	NP25/.....RE	NP25/.....S	-	12-70	3,2-18,5	700-120	10150-1740
P11/.....	-	-	-	-	3-15	0,8-4	200-150	2900-2175
-	-	P20/.....RE	-	-	15-23	4-6,1	160-100	2320-1450
P21/.....	-	-	P21/.....S	-	5-23	1,3-6,1	450-130	6525-1885
P22/.....	-	-	-	-	15-28	4-7,4	280-100	4060-1450
P30/.....(B)	-	-	-	-	22-43	5,8-11,4	150-130	2175-1885
P31/25-220	-	-	-	-	25	6,6	220	3190
P41/.....	-	P41/.....RE	P41/.....S	-	34-68	9-18	250-110	3625-1595
P45/.....	-	-	-	-	37-123	9,8-32,5	400-80	5800-1160
P50/94-110	P50/94-110 R	P50/94-110 RE	-	-	94	24,8	110	1595
P51/.....	-	P51/135-90 RE	P51/135-90 S	P51/135-90DUP	97-134	25,6-35,4	140-90	2030-1305
P52/.....(C)(B)	P52/.....R	P52/.....RE	-	-	13-123	3,4-32,5	1000-120	14500-1740
P55/.....(G)	-	P55/.....RE	-	-	18-165	4,8-43,6	1200-100	17400-1450
P62/.....(B)	P62/.....R	P62/175-120RE	P62/175-120 S	-	48-176	12,7-46,5	420-120	6090-1740
P71/.....(G+C)	P71/.....R	P71/.....RE	P71/250-100 S	-	37-249	9,8-65,8	700-100	10150-1450
P72/400-70 B	P72/320-100 R	P72/320-100RE	-	-	320-400	84,5-106	100-70	1450-1015
P75/.....G (U)	-	-	-	-	210-320	55,5-84,5	200-140	2900-2030
P81/.....(G)(B)(U)	-	P81/400-140RE	P81/400-140 S	P81/215-260DUP	110-500	29,1-132	500-100	7250-1450

G = Spheriodical cast Iron, Nickel-plated
 C = for CO₂ (Carbondioxide)
 B = Bentonite Versions
 U = Gearbox integrated